

# LOOP

## ANCHOR POINT

### UNOBTRUSIVE

Under-tile fastening ensures a low visual impact, ideal for installation on roofs in historic centres.

### FAST


Fast and easy installation, with just two HBS Ø8 screws.



LOAD DIRECTION



TYPES OF APPLICATION

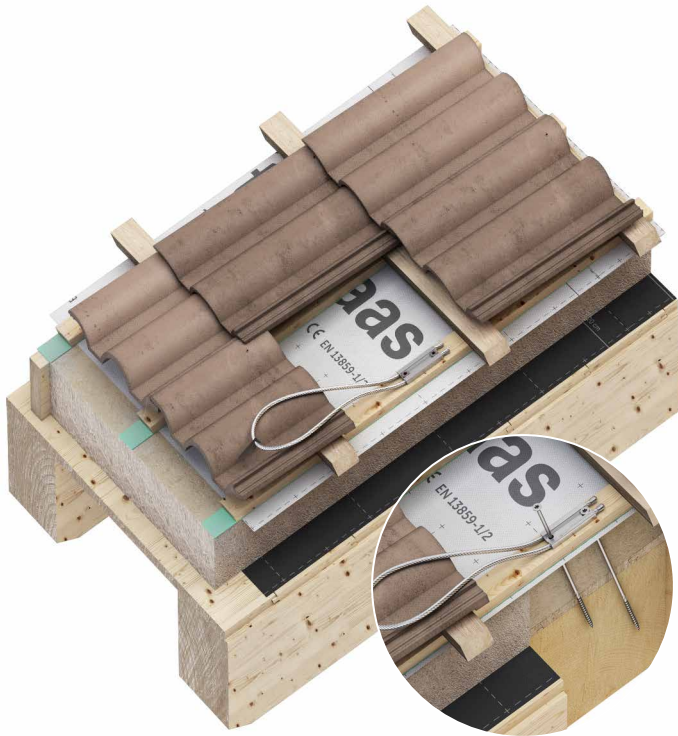

## TECHNICAL DATA\*

substructure	minimum thickness	fasteners
GL24h	100 x 100 mm	HBS Ø8

\* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

substructure	minimum thickness	fastening + KRAKEN
C20/25	100 mm	M8 5.8 rod  + ULS + MUT VINIFIX/HYBIFIX

## CODES AND DIMENSIONS

CODE	material	B [mm]	H [mm]	L [mm]	pcs	
LOOP	AISI 316 stainless steel grade 1.4401 / EN AW 6060 T6	-	12	456	1	
LOOPXL	AISI 316 stainless steel grade 1.4401 / EN AW 6060 T6	-	12	756	1	
KRAKEN	AISI 430 stainless steel grade 1.4016 IIA	100	18	116	1	

CODE	description	page
PALMIFIX	universal counterplate	230
OMEGA	accessory for PALMIFIX	230

CODE	description	page
BEFPALMI	fastening set for PALMIFIX	231